
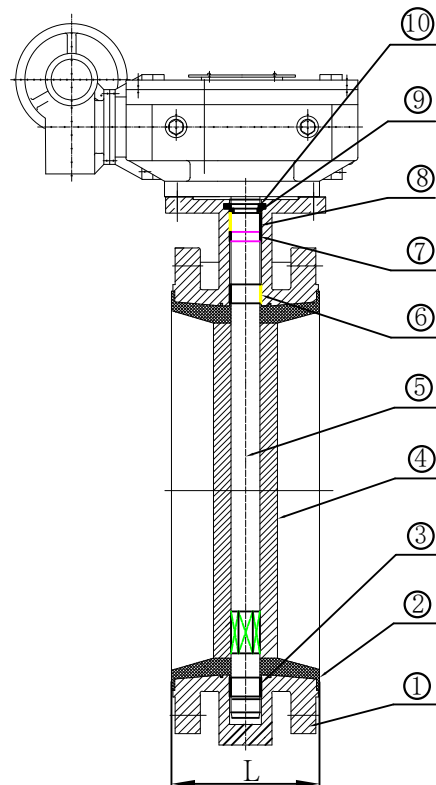


Product performance specification	
Nominal pressure	1.6MPa
test medium	water
PN Nominal pressure	2.4MPa
operation temperature	-10° ~ 80° C

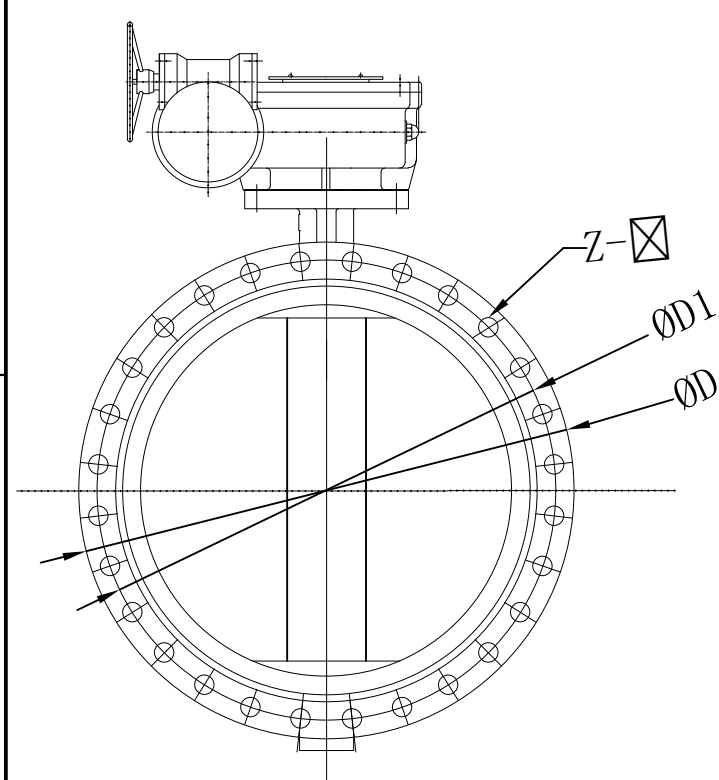

DN	41	D		D1		z-φ	
	L	PN10	PN16	PN10	PN16	PN10	PN16
DN50	108	165	165	125	125	4-19	4-19
DN65	112	185	185	145	145	4-19	4-19
DN80	114	200	200	160	160	8-19	8-19
DN100	127	220	220	180	180	8-19	8-19
DN125	140	250	250	210	210	8-19	8-19
DN150	140	285	285	240	240	8-23	8-23
DN200	152	340	340	295	295	8-23	12-23
DN250	165	395	400	350	355	12-23	12-28
DN300	178	445	455	400	410	12-23	12-28
DN350	190	505	520	460	470	16-23	16-28
DN400	216	565	580	515	525	16-28	16-31
DN450	222	615	640	565	585	20-28	20-31
DN500	229	670	715	620	650	20-28	20-34
DN600	267	780	840	725	770	20-31	20-37
DN700	292	895	910	840	840	24-31	24-37
DN800	318	1015	1025	950	950	24-34	24-41
DN900	330	1115	1125	1050	1050	28-34	28-41
DN1000	410	1230	1225	1160	1170	28-34	28-44
DN1200	470	1455	1485	1380	1390	32-34	32-50

Part name & Description		
10	JUMP RING	DIN 472
9	GASKET	DIN 126
8	BUSH	BRASS
7	RUBBER GASKET	EPDM
6	BUSH	BRASS
5	STEM	2CR13
4	DISC	GGG50 (galvanized)
3	BUSH	BRASS
2	SEAT	EPDM
1	BODY	GGG50
NO	NAME	Material

**Application**

1. Face to face is according to DIN EN558-1,
2. Flange drilled is according to DIN EN1092-2,
3. Working temperature:-10°~80°C,
4. working pressure:PN10-PN16.

assembly drawing	D341X
	butterfly valve