


JUDBERD MACHINERY



RESTRAINED COUPLING

RESTRAINED TYPE FOR HDPE PIPE(OD≤315)



FOR BIGGER SIZE, PLEASE REFERE TO OUR MECHANICAL JOINT COUPLING FOR HDPE PIPE SR NO. JC011 AS LEFT PHOTO



2 YEARS WARRANTY



30 YEARS EXPERIENCE

● CERTIFIED TO WRAS AND ACS



FEATURE



ONLY ACCOMMODATES TO HDPE PIPE, DESIGNED ACCORDING TO HDPE PIPE CHARACTERISTICS AND DIMENSIONS, GOOD SEALING




CASTINGS ARE PRODUCED BY AUTO MOLDELLING LINE, THE SURFACE OF THE CASTING IS SMOOTHER BECAUSE THE MECHANICAL MANUFACTURE COMPACTS IT MORE TIGHTLY. MORE EFFICIENT, SO LOWER COSTS AND FASTER DELIVERY TIMES.



RAPID INSTALLATION



CHINA MANUFACTURER DIRECTLY SALE

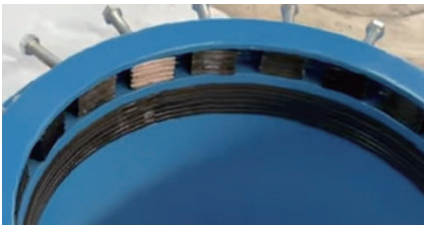

EXCEPT DUCTILE IRON MATERIAL TYPE, WE ALSO CAN SUPPLY CUSTOMIZED STEEL MATERIAL TYPE



SEGMENT DESIGN GRIP RING ALLOWS FOR SOME PIPE OVALISATION THE BARBED DESIGN OF THE GRIP RING ENHANCES GRIP AS THE PIPE MOVES.



PIPE STIFFENERS CAN EFFECTIVELY PREVENT THE DEFORMATION OF HDPE PIPE AND PREVENT THE OVAL OF PIPE

NOTE



DATA SUCH AS THE ABOVE IS BASED ON OUR MOST ACCURATE AT THE TIME OF OUR RELEASE, BUT WE MAY MAKE UPDATES OR IMPROVEMENTS TO OUR PRODUCTS, SO IF YOU NEED THE LATEST, PLEASE CONTACT US.

JUDBERD MACHINERY



RESTRAINED COUPLING FOR HDPE

DATA SHEET

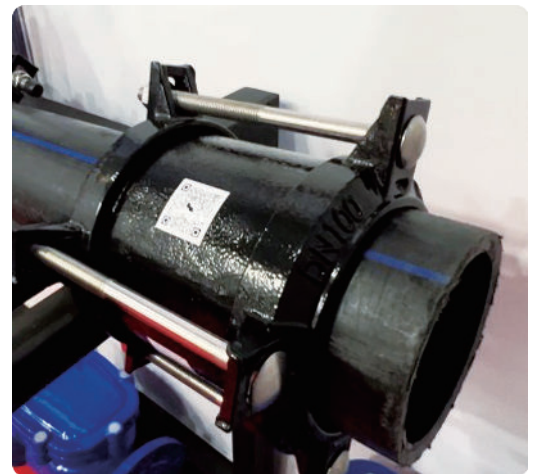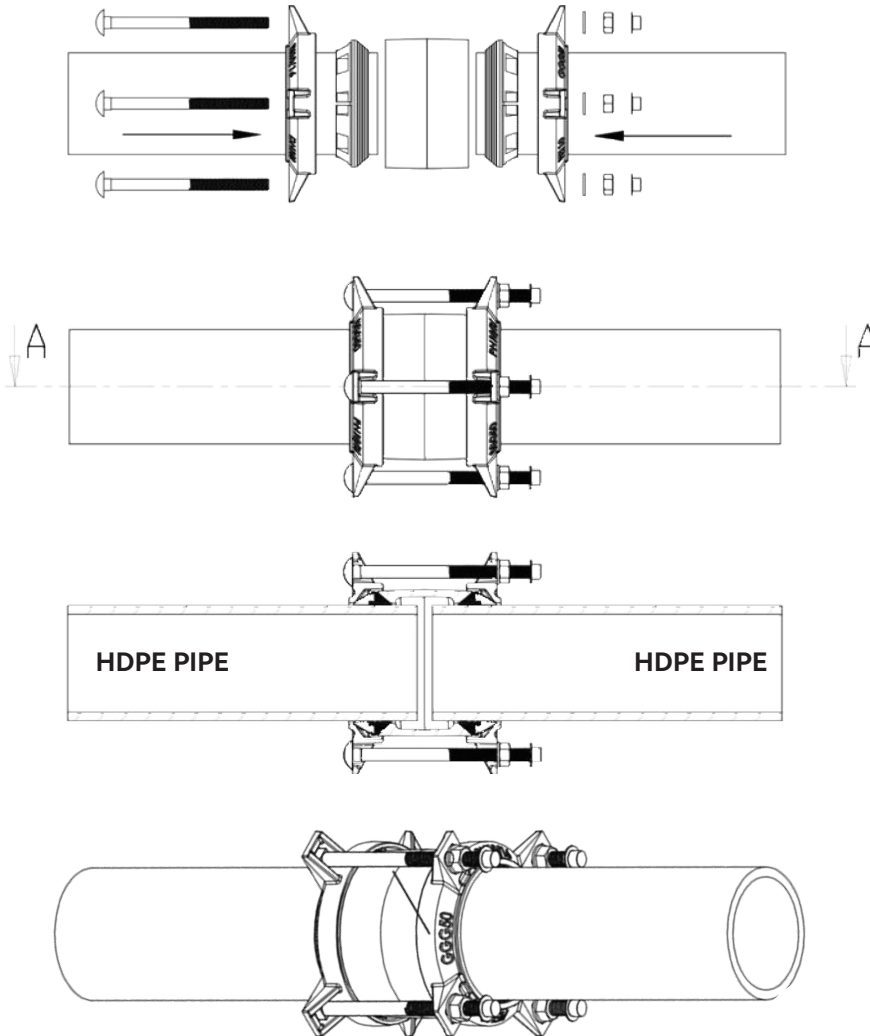

NOMINAL DIAMETER/HDPE PIPE OUTSIDE DIAMETER	MAXIMUM PIPE INSERTION DEPTH	HDPE PIPE MAXIMUM OVAL	MAXIMUM HDPE PIPE OD TOLERANCE
DN/OD			
FROM DN50/OD63 TO DN150 /OD180	50-70	2	±1
FROM DN200/OD200 TO DN250/OD280	50-85	2	±1
DN300/OD315	50-95	2	±1

- PLEASE NOTE THAT THE MAXIMUM PIPE INSERTION DEPTH REFERS TO THE DISTANCE FROM THE END RING OUTSIDE SURFACE TO THE END OF THE PIPE WHEN THE RESTRAINED COUPLING IS TIGHTENED TO A WORKING CONDITION.

NOTE

DATA SUCH AS THE ABOVE IS BASED ON OUR MOST ACCURATE AT THE TIME OF OUR RELEASE, BUT WE MAY MAKE UPDATES OR IMPROVEMENTS TO OUR PRODUCTS, SO IF YOU NEED THE LATEST, PLEASE CONTACT US.