


UNIVERSAL FLANGE ADAPTOR

QINGDAO JUDBERD MACHINERY CO LTD
0086-153-1552-2185

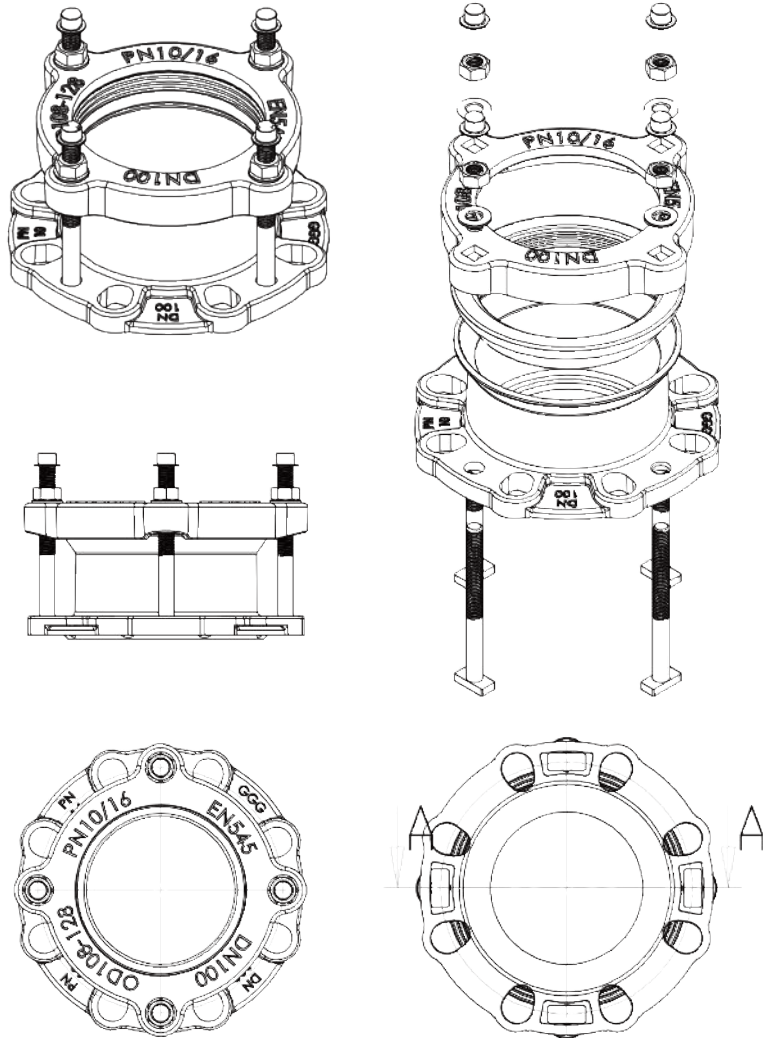

① PLASTIC CAP
(PROTECT BOLTS THREAD)

② CS OR SS WASHER
(DAROMET THICKNESS
8-10UM, HOT DIP GALVA-
NIZATION 30-40UM,TEF-
LON COATING)

④ DUCTILE IRON END
RINGS ACCORDING TO
EN1563

③ CS OR SS NUT
(DAROMET THICKNESS
8-10UM, HOT DIP GALVA-
NIZATION 30-40UM,
TEFLON COATING)

⑤ EPDM GASKET AC-
CORDING TO EN681-1,
SBR, NBR CAN BE APPLI-
CABLE

⑥ DUCTILE IRON BODY
ACCORDING TO EN1563

⑦ T-HEAD BOLT/CAR-
RIAGE BOLT/HEX BOLTS
(DAROMET THICKNESS
8-10UM, HOT DIP GALVA-
NIZATION 30-40UM,TEF-
LON COATING)


PRECAUTIONS

THIS UNIVERSAL FLANGE ADAPTOR CAN'T ACCOMMODATES TO HDPE PIPES,
WITHOUT GRIP RINGS TO AVOID PIPES TO BE PULLED OUT,
IF YOU NEED RESTRAINED TYPE, PLEASE REFER TO OUR RESTRAINED FLANGE ADAPTOR,
SEE PAGE 2 FOR TECHNICAL SPECIFICATIONS.



UNIVERSAL FLANGE ADAPTOR

QINGDAO JUDBERD MACHINERY CO LTD
0086-153-1552-2185

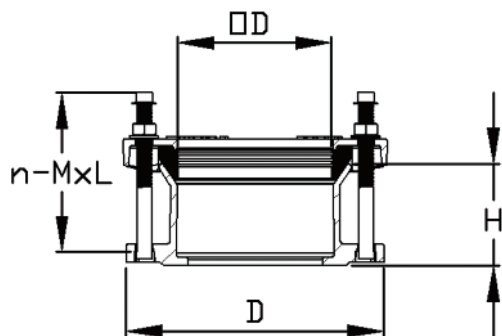

FLANGE SIZE	WORKING PRESSURE	OD RANGE	FLANGE OUTSIDE DIAMETER	FLANGE BODY HEIGHT	BOLTS NUMBER-BOLTS SIZExBOLTS LENGTH	BOLTS TYPE	MAXIMUM AFFORDABLE PRESSURE (bar)	MAXIMUM DEFLECTION (DEGREES)	APPX.WEIGHT(kgs)
NOMINAL DIAMETER	PN	PIPE OUTSIDE DIAMETER	D	H	n-MxL				
DN40	PN10/16	48-60	145	82	2-M12x130	T-HEAD BOLT	25	±3°	3.1
DN50	PN10/16	59-72	169	82	4-M12x130	T-HEAD BOLT	25	±3°	3.5
DN65	PN10/16	72-85	182	82	4-M12x130	T-HEAD BOLT	25	±3°	3.6
DN80	PN10/16	88-103	209	82	4-M12x130	T-HEAD BOLT	25	±3°	4.3
DN100	PN10/16	98-118	226	85	4-M12x130	T-HEAD BOLT	25	±3°	6
DN100	PN10/16	108-128	226	85	4-M12x130	T-HEAD BOLT	25	±3°	5.2
DN125	PN10/16	132-153	257	82	4-M12x130	T-HEAD BOLT	25	±3°	6.6
DN150	PN10/16	150-170	282	82	4-M12x130	T-HEAD BOLT	25	±3°	6.9
DN150	PN10/16	159-182	282	82	4-M12x130	T-HEAD BOLT	25	±3°	6.8
DN200	PN10/16	190-210	337	82	4-M12x130	T-HEAD BOLT	25	±3°	10.9
DN200	PN10/16	218-235	337	82	4-M12x130	T-HEAD BOLT	25	±3°	9.9
DN250	PN10/16	242-267	408	95	6-M12x140	T-HEAD BOLT	25	±3°	14.7
DN250	PN10/16	272-289	408	95	6-M12x140	T-HEAD BOLT	25	±3°	13.3
DN300	PN10/16	315-332	454	95	6-M12x140	T-HEAD BOLT	25	±3°	17.6
DN300	PN10/16	322-339	454	95	6-M12x140	T-HEAD BOLT	25	±3°	16.8
DN300	PN10/16	340-360	454	130	6-M14x185	CARRIAGE BOLT	25	±3°	23
DN350	PN10/16	351-378	520	112	8-M14x170	HEX BOLTS	25	±3°	27.7
DN350	PN10/16	374-391	520	112	8-M14x170	HEX BOLTS	25	±3°	26.6
DN350	PN10/16	386-410	535	140	8-M14x200	HEX BOLTS	25	±3°	30.2
DN400	PN10/16	386-410	580	110	8-M14x170	HEX BOLTS	25	±3°	34
DN400	PN10/16	398-429	580	112	8-M14x170	HEX BOLTS	25	±3°	31
DN400	PN10/16	417-437	580	110	8-M14x170	HEX BOLTS	25	±3°	28.8
DN450	PN10/16	438-458	640	113	10-M14x170	HEX BOLTS	25	±3°	40
DN450	PN10/16	476-493	640	113	10-M14x170	HEX BOLTS	25	±3°	38.3
DN500	PN10/16	500-516	715	110	10-M14x180	HEX BOLTS	25	±3°	47.5
DN500	PN10/16	500-532	715	115	10-M14x180	HEX BOLTS	25	±3°	50
DN500	PN10/16	526-546	715	113	10-M14x180	HEX BOLTS	25	±3°	49
DN500	PN10/16	540-570	715	150	10-M14x220	HEX BOLTS	25	±3°	52
DN600	PN10/16	580-605	838	115	10-M14x180	T-HEAD BOLT	25	±3°	67
DN600	PN10/16	600-630	838	115	10-M14x180	HEX BOLTS	25	±3°	63.5
DN600	PN10/16	630-650	838	115	10-M14x180	HEX BOLTS	25	±3°	58
DN700	PN10/16	720-738	910	125	12-M14x185	HEX BOLTS	25	±3°	72.3
DN700	PN10/16	730-745	910	125	12-M14x185	HEX BOLTS	25	±3°	71
DN800	PN10/16	820-842	1025	125	12-M16x190	HEX BOLTS	25	±3°	95

NOTE

DATA SUCH AS THE ABOVE IS BASED ON OUR MOST ACCURATE AT THE TIME OF OUR RELEASE, BUT WE MAY MAKE UPDATES OR IMPROVEMENTS TO OUR PRODUCTS, SO IF YOU NEED THE LATEST, PLEASE CONTACT US.

