

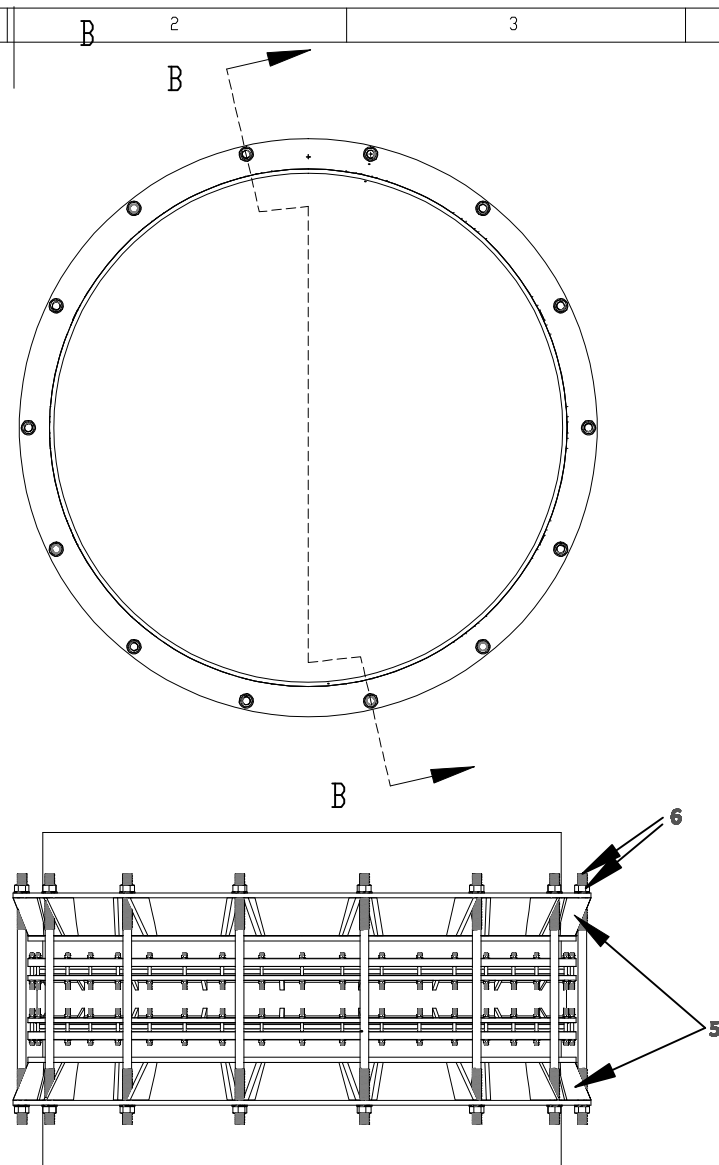


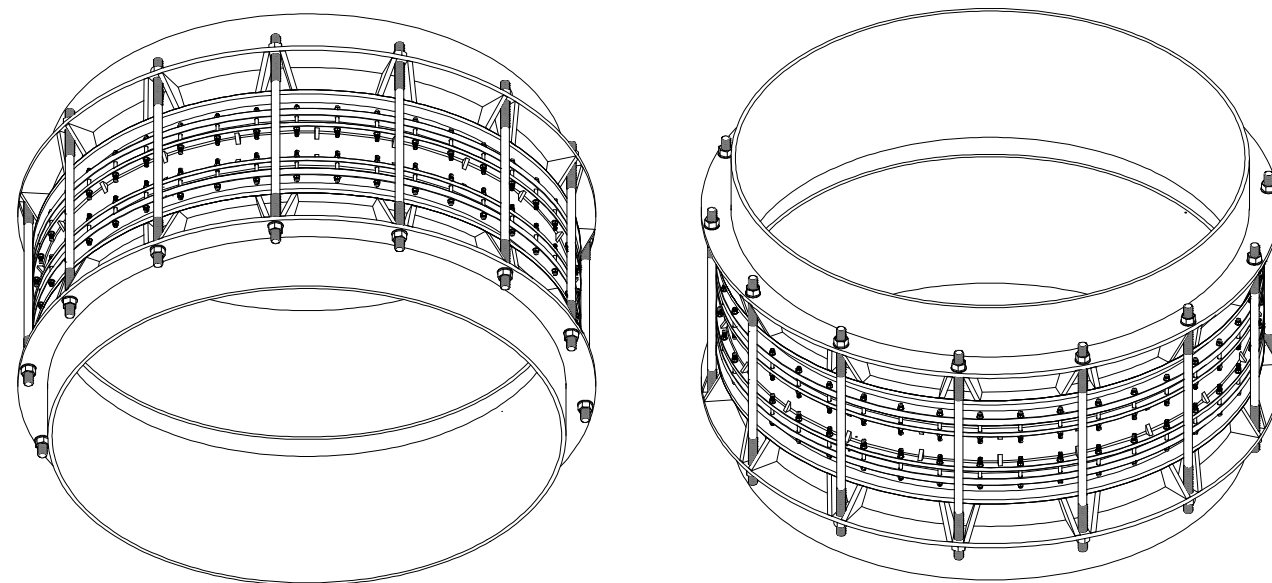

No.	Part	Material
1	Center sleeve	Carbon steel Q235B with Liquid Epoxy conform to AWWA C210 , DFT : 406 M corn (M n) .
2	End ring	Carbon steel Q235B with Liquid Epoxy conform to AWWA C210 , DFT : 406 M corn (M n) .
3	Bolts,nuts and washers	ASTM A307 Grade B and hot-dip galvanized
4	Gasket	EDPM conform to BS 2494 HARDNESS (IRDH) 66-75.
5	Harness	Carbon steel Q235B with Liquid Epoxy conform to AWWA C210 , DFT : 406 M corn (M n) .
6	Stud bolts and nuts for harness	ASTM A193 B7 & A194 2H and hot-dip galvanized

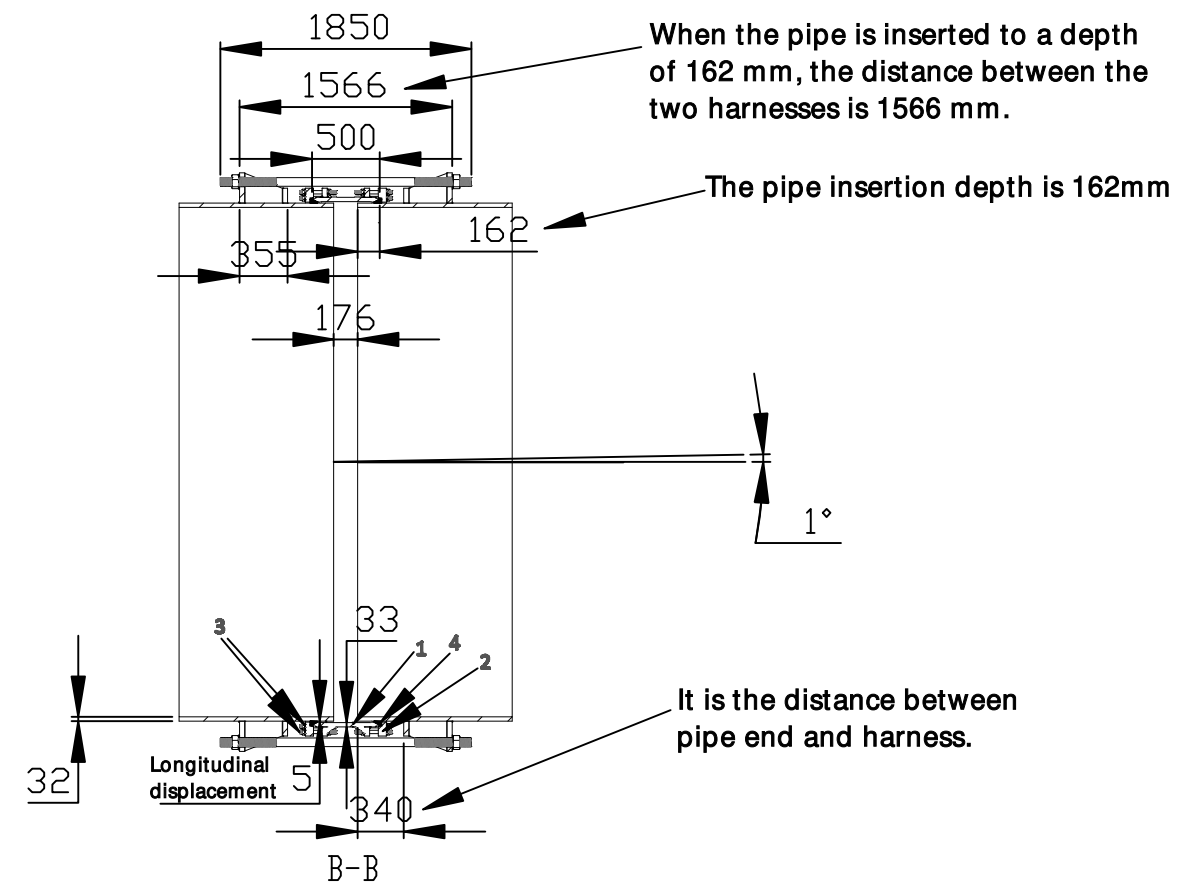

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
						Qingdao Judberd Machinery Co.,Ltd			
						TITLE:			
						DN3800 OD3820 Mechanical Coupling with Harness			
						DWG NO.		A3	
						SCALE:1:50		SHEET 1 OF 1	