


① DUCTILE IRON BODY
 ACCORDING TO EN1563

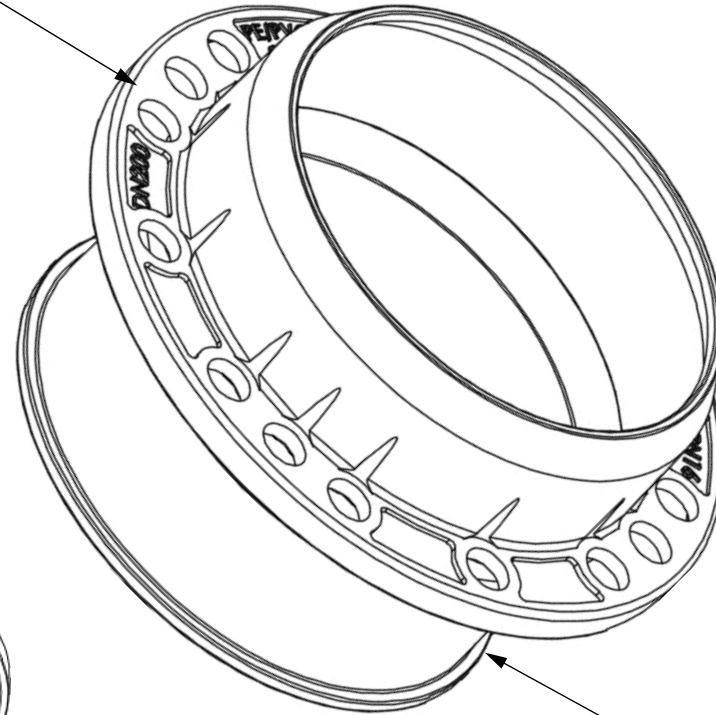


② EPDM GASKET
 ACCORDING TO
 EN681-1, SBR, NBR
 CAN BE APPLICABLE

PRECAUTIONS

THIS QUICK FLANGE ADAPTOR IS DESIGNED FOR PVC PIPE ONLY.
 THIS QUICK FLANGE ADAPTOR CAN' T AFFORD HIGHER PRESSURE THAN 24 BAR.
 FOR HIGHER PRESSURE THAN 24 BARS, PLEASE REFER TO OUR
 UNIVERSAL FLANGE ADAPTOR OR DEDICATED FLANGE ADAPTOR FOR PVC PIPE.

SEE PAGE 2 FOR TECHNICAL SPECIFICATIONS.

| | | | | | |
|---|------|-----------|-----------------------------------|---|--------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR: | | FINISH: | DEBUR AND BREAK SHARP EDGES | DO NOT SCALE DRAWING | REVISION |
| DRAWN | NAME | SIGNATURE | DATE | TITLE: QUICK FLANGE ADAPTOR FOR PVC | |
| CHK'D | | | | MANUFACTURER QINGDAO JUDBERD MACHINERY CO LTD | |
| APP'VD | | | | SCALE: | SHEET 2 OF 2 |
| MFG | | | | WEIGHT: | |
| Q.A | | | | MATERIAL: | |

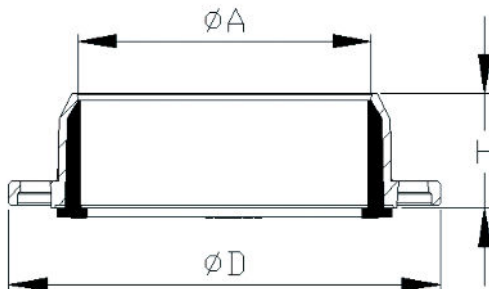

SECTION A-A

| FLANGE SIZE | PVC PIPE OUTSIDE DIAMETER | FLANGE OUTSIDE DIAMETER | BODY HEIGHT | SOCKET END INSIDE DIAMETER | APPX.WEIGHT (KGS) |
|-------------|---------------------------|-------------------------|-------------|----------------------------|-------------------|
| DN | OD | D | H | A | |
| DN40/50 | 50 | 163 | 50 | 53 | 1.6 |
| DN50/60/65 | 63 | 185 | 50 | 65 | 2.4 |
| DN60/65 | 75 | 185 | 55 | 78 | 2.1 |
| DN80 | 90 | 196 | 60 | 93 | 2.5 |
| DN100 | 110 | 218 | 65 | 113 | 3.1 |
| DN125 | 125 | 254 | 70 | 128 | 4.6 |
| DN125 | 140 | 254 | 70 | 143 | 4.3 |
| DN150 | 160 | 280 | 80 | 164 | 5.3 |
| DN200 | 200 | 338 | 91 | 202.5 | 7.6 |
| DN200 | 225 | 338 | 91 | 227.5 | 7.0 |
| DN250 | 250 | 400 | 97 | 252.5 | 10.9 |
| DN300 | 315 | 455 | 105 | 318 | 13.8 |
| DN400 | 400 | 576 | 120 | 406 | 22.5 |

NOTE

DATA SUCH AS THE ABOVE IS BASED ON OUR MOST ACCURATE AT THE TIME OF OUR RELEASE, BUT WE MAY MAKE UPDATES OR IMPROVEMENTS TO OUR PRODUCTS, SO IF YOU NEED THE LATEST, PLEASE CONTACT US.

| | | | | | | | | | | | |
|---|--|-----------|--|---------|--|-----------------------------|--|----------------------|--|-------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS | | | | FINISH: | | DEBUR AND BREAK SHARP EDGES | | DO NOT SCALE DRAWING | | REVISION | |
| SURFACE FINISH: | | | | | | | | | | | |
| TOLERANCES: | | | | | | | | | | | |
| LINEAR: | | | | | | | | | | | |
| ANGULAR: | | | | | | | | | | | |
| DRAWN | | SIGNATURE | | DATE | | | | | | TITLE: | |
| CHK'D | | | | | | | | | | QUICK FLANGE ADAPTOR FOR PVC | |
| APP'VD | | | | | | | | | | MANUFACTURER | |
| MFG | | | | | | | | | | QINGDAO JUDBERD MACHINERY CO LTD | |
| Q.A | | | | | | MATERIAL: | | | | | |
| | | | | | | | | | | | |
| | | | | | | WEIGHT: | | | | SCALE: | |
| | | | | | | | | | | SHEET 2 OF 2 | |