

JUDBERD MACHINERY



QUICK FLANGE ADAPTOR FOR HDPE PIPE

QUICK FLANGE ADAPTOR FOR HDPE PIPE

QUICK INSTALLATION TYPE WITHOUT TIE RODS



THE QUICK FLANGE ADAPTOR GASKET CAN WORK AS SEALING GASKET BETWEEN TWO FLANGES



2 YEARS WARRANTY



30 YEARS EXPERIENCE

● CERTIFIED TO WRAS AND ACS





FEATURE



DUCTILE IRON MATERIAL BODY AND ACCOMMODATES TO HDPE PIPE, HIGHER STRENGTH THAN THE PE MATERIAL TYPE.



RAPID INSTALLATION, NO TIE RODS DESIGN, ASSEMBLE TWO FLANGES WELL AND TIGHTEN THEM, THEN SEALING BETWEEN THE QUICK FLANGE ADAPTOR AND THE PIPE ACHIEVED. AND THE GRIP RING WILL GRIP PIPE AUTOMATICALLY.

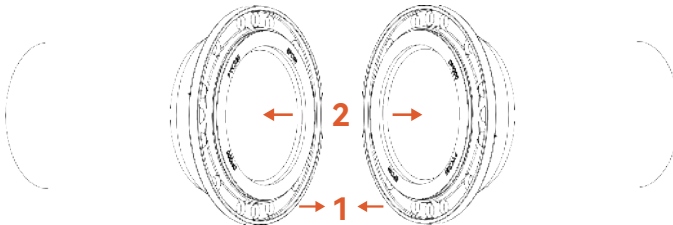

- ① TIGHTEN TWO FLANGES ② GASKETS ARE PUSHED TOWARD THE PIPE
- ③ GASKET MOVED TOWARDS THE NARROW PART IN THE AHEAD OF QUICK FLANGE ADAPTOR TO BE SQUEEZED TO ACHIEVE SEALING AROUND THE PIPE.
- ④ THE GRIP RING WAS PUSHED TOWARDS THE NARROW PART OF THE AHEAD OF QUICK FLANGE ADAPTOR TO BECOME SMALL DIAMETER TO GRIP HDPE PIPE TO AVOID PIPE MOVEMENT.



CASTINGS ARE PRODUCED BY AUTO MOLDELLING LINE, THE SURFACE OF THE CASTING IS SMOOTHER BECAUSE THE MECHANICAL MANUFACTURE COMPACTS IT MORE TIGHTLY. MORE EFFICIENT, SO LOWER COSTS AND FASTER DELIVERY TIMES.



CHINA MANUFACTURER DIRECTLY SALE



FLANGE IS DESIGNED ACCORING TO EN1092-2, BOTH PN10 AND PN16 ARE OK.



MAXIMUM SIZE IS DN400/OD400, LARGE SIZE CAN'T WORK WELL, BIGGER SIZE FLANGE ADAPTOR FOR HDPE PIPE, PLEASE REFER TO RESTRAINED FLANGE ADAPTOR SERIES NO. FA004 (DESIGNED FOR HDPE PIPE ONLY) AND AQUA GRIP FLANGE ADAPTOR SERIES NO. FA003 (DESIGNED WIDE RANGE TYPE INCLUDE HDPE PIPE)

NOTE

DATA SUCH AS THE ABOVE IS BASED ON OUR MOST ACCURATE AT THE TIME OF OUR RELEASE, BUT WE MAY MAKE UPDATES OR IMPROVEMENTS TO OUR PRODUCTS, SO IF YOU NEED THE LATEST, PLEASE CONTACT US.